

Integrated grabber

Integrated grabber for tiltrotators and rotators 6,600–72,700 lbs (3–33 metric ton)

- » The grab arms are made from high-strength steel for strength and low weight.
- » Check valves in each grab cylinder.
- » The perfect workmate on the site.
- » Versatile handling of posts and curbstones, and other objects.
- » Practical for pipe laying and manhole positioning.
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226 and EC233.
- » 3-finger claws as standard.
- » Complies with European safety standard.

Feature GR30 (S80 and S3):


- ▶ Grabber grasp up to 42.5 inches



Specifications

Model	GR05	GR10	GR30*
Widest grabber width A: (inch)	13.8	24	42.5
Width B: (inch)	7.9	10.6	17.3
Length C: (inch)	23.0	29.9	38.6
Clamping force, tip - tip, at 21 MPa: (lbs)	3,646	3,300	4,312
Max load: (lbs)	2,205	3,307	4,850
Weight: (lbs)*	110	154	326
Max hydraulic pressure: (psi)	3,200	3,200	3,200

* Depending on attachment.

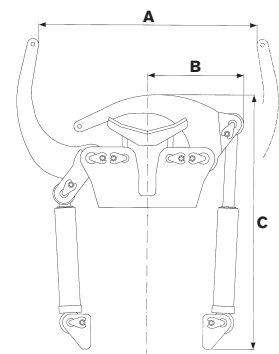

CHANGE THE WORLD OF DIGGING

engcon North America Inc. | 2666 State Street, Hamden CT 06517
 Phone +1 203 691 5920 | Email northamerica@engcon.com | Web engcon.com