

Integrated gripper

Integrated gripper for tiltrotators and rotators 3–33 tonnes

- » The gripper arms are made from high-strength steel for strength and low weight.
- » Load-holding check valves in each gripper cylinder.
- » The perfect workmate on the site.
- » Versatile handling of posts, kerbstones and other objects.
- » Practical for pipe laying and manhole positioning.
- » Available for tiltrotators/rotators EC204, EC206, EC209, EC214, EC219, EC226 and EC233.
- » 3 finger claws as standard.
- » Complies with European safety standards.

Features of the GR30 (S80):


- ▶ Gripper width up to 1 080 mm



Specifications

Model	GR05	GR10	GR30*
Widest grab width A: (mm)	350	610	1 080
Width B: (mm)	200	270	440
Length C: (mm)	585	760	980
Clamping force (tip - tip) at 21 MPa: (kg)	1 654	1 497	1 956
Max load: (kg)	1 000	1 500	2 200
Weight: (kg)*	50	70	148
Max hydraulic pressure: (MPa)	22	22	22

* Depending on attachment

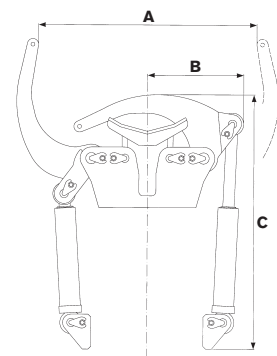

CHANGE THE WORLD OF DIGGING

engcon Australia | 62 Power Street, St Marys, NSW 2760
 Tel +61 2 7252 5279 | E-mail australia@engcon.com | Web engcon.com